

Product Specifications

6 VOLT										
ITEM NO	BATTERY MODEL	VOLTS	Ah (20hr rate)	L	w	н	TOTAL H	WEIGHT	TERMINALS	
170016	PS612	6	1.2	97	24	51.5	57.5	0.28	T1	
170018	PS628	6	2.8	66	33	97	103	0.59	T1	
170030	PS630	6	3.2	134	34	60	66	0.62	T1	
170019	PS640	6	4	70	47	100	106	0.69	T1	
170020	PS650	6	5	68	68	96	109	0.80	SPRING	
170021	PS670	6	7	151	34	94	100	1.15	T1	
170015	PS6100	6	10	151	51	94	100	1.62	T1	
170024	PS6120W	6	12	151	51	94	100	1.83	T2	
170025	PS6130	6	13	108	70	140	140	2.17	T1/T2	
170017	PS6200	6	20	157	83	125	125	3.21	T3	

TIEM NO											
170000 PS1208 12 0.8 96 25 62 62 0.34 AMP MATE-N-LOG 170002 PS1212 12 1.2 97 43 52 58 0.57 T1 170005 PS1220 12 2 178 35 60 66 1.00 T1 170027 PS1223 12 2.3 178 35 60 66 1.00 T1 170007 PS1229 12 2.9 79 56 99 105 1.10 T1 170031 PS1230 12 3 141 33 102 108 1.20 T1 170008 PS1232 12 3.2 134 67 60.5 66.5 1.33 T1 170010 PS1240 12 4 90 70 101 107 1.48 T1 170033 PS1250L 12 5 151 53 93 99 1.74 T1	12 VOLT										
170002 PS1212 12 1.2 97 43 52 58 0.57 T1 170005 PS1220 12 2 178 35 60 66 1.00 T1 170027 PS1223 12 2.3 178 35 60 66 1.00 T1 170007 PS1229 12 2.9 79 56 99 105 1.10 T1 170031 PS1230 12 3 141 33 102 108 1.20 T1 170008 PS1232 12 3.2 134 67 60.5 66.5 1.33 T1 170010 PS1240 12 4 90 70 101 107 1.48 T1 170028 PS1250L 12 5 151 53 93 99 1.74 T2 170033 PS1250S 12 5 151 53 93 99 1.74 T1	ITEM NO	BATTERY MODEL	VOLTS	Ah (20hr rate)	L	w	Н	TOTAL H	WEIGHT	TERMINALS	
170005 PS1220 12 2 178 35 60 66 1.00 T1 170027 PS1223 12 2.3 178 35 60 66 1.00 T1 170007 PS1229 12 2.9 79 56 99 105 1.10 T1 170031 PS1230 12 3 141 33 102 108 1.20 T1 170008 PS1232 12 3.2 134 67 60.5 66.5 1.33 T1 170010 PS1240 12 4 90 70 101 107 1.48 T1 170028 PS1250L 12 5 151 53 93 99 1.74 T2 170033 PS1250S 12 5 151 53 93 99 1.74 T1	170000	PS1208	12	0.8	96	25	62	62	0.34	AMP MATE-N-LOCK	
170027 PS1223 12 2.3 178 35 60 66 1.00 T1 170007 PS1229 12 2.9 79 56 99 105 1.10 T1 170031 PS1230 12 3 141 33 102 108 1.20 T1 170008 PS1232 12 3.2 134 67 60.5 66.5 1.33 T1 170010 PS1240 12 4 90 70 101 107 1.48 T1 170028 PS1250L 12 5 151 53 93 99 1.74 T2 170033 PS1250S 12 5 151 53 93 99 1.74 T1	170002	PS1212	12	1.2	97	43	52	58	0.57	T1	
170007 PS1229 12 2.9 79 56 99 105 1.10 T1 170031 PS1230 12 3 141 33 102 108 1.20 T1 170008 PS1232 12 3.2 134 67 60.5 66.5 1.33 T1 170010 PS1240 12 4 90 70 101 107 1.48 T1 170028 PS1250L 12 5 151 53 93 99 1.74 T2 170033 PS1250S 12 5 151 53 93 99 1.74 T1	170005	PS1220	12	2	178	35	60	66	1.00	T1	
170031 PS1230 12 3 141 33 102 108 1.20 T1 170008 PS1232 12 3.2 134 67 60.5 66.5 1.33 T1 170010 PS1240 12 4 90 70 101 107 1.48 T1 170028 PS1250L 12 5 151 53 93 99 1.74 T2 170033 PS1250S 12 5 151 53 93 99 1.74 T1	170027	PS1223	12	2.3	178	35	60	66	1.00	T1	
170008 PS1232 12 3.2 134 67 60.5 66.5 1.33 T1 170010 PS1240 12 4 90 70 101 107 1.48 T1 170028 PS1250L 12 5 151 53 93 99 1.74 T2 170033 PS1250S 12 5 151 53 93 99 1.74 T1	170007	PS1229	12	2.9	79	56	99	105	1.10	T1	
170010 PS1240 12 4 90 70 101 107 1.48 T1 170028 PS1250L 12 5 151 53 93 99 1.74 T2 170033 PS1250S 12 5 151 53 93 99 1.74 T1	170031	PS1230	12	3	141	33	102	108	1.20	T1	
170028 PS1250L 12 5 151 53 93 99 1.74 T2 170033 PS1250S 12 5 151 53 93 99 1.74 T1	170008	PS1232	12	3.2	134	67	60.5	66.5	1.33	T1	
170033 PS1250S 12 5 151 53 93 99 1.74 T1	170010	PS1240	12	4	90	70	101	107	1.48	T1	
	170028	PS1250L	12	5	151	53	93	99	1.74	T2	
170014 PS1270S 12 7 151 65 94 100 2.20 T1	170033	PS1250S	12	5	151	53	93	99	1.74	T1	
	170014	PS1270S	12	7	151	65	94	100	2.20	T1	
170013 PS1270L 12 7 151 65 94 100 2.20 T2	170013	PS1270L	12	7	151	65	94	100	2.20	T2	
170038 PS1285 12 8.5 151 65 95 100 2.75 T1	170038	PS1285	12	8.5	151	65	95	100	2.75	T1	
170023 PS1290 12 9 151 98 95 101 3.10 T2	170023	PS1290	12	9	151	98	95	101	3.10	T2	
170001 PS12100 12 10 151 65 111 117 3.20 T2	170001	PS12100	12	10	151	65	111	117	3.20	T2	
170032 PS12120S 12 12 151 98 95 101 3.56 T1	170032	PS12120S	12	12	151	98	95	101	3.56	T1	
170003 PS12120L 12 12 151 98 95 101 3.56 T2	170003	PS12120L	12	12	151	98	95	101	3.56	T2	
170004 PS12180 12 18 182 77 168 167.5 5.30 T3	170004	PS12180	12	18	182	77	168	167.5	5.30	Т3	
170006 PS12240 12 24 167 175 125 126 7.20 T3	170006	PS12240	12	24	167	175	125	126	7.20	T3	
170029 PS12260H 12 26 165 125 175 182 9.20 T10	170029	PS12260H	12	26	165	125	175	182	9.20	T10	
170009 PS12330 12 33 195 130 158 177 11.20 T5	170009	PS12330	12	33	195	130	158	177	11.20	T5	
170011 PS12400 12 40 199 167 169 167 13.00 T10	170011	PS12400	12	40	199	167	169	167	13.00	T10	
170012 PS12650 12 65 348 167 178 178 20.30 T6	170012	PS12650	12	65	348	167	178	178	20.30	T6	






















Dispose of your used battery responsibly and help create a cleaner future. Simply visit recycle W battery.com.au or call 1300 650 702 to find your nearest approved Battery Recycling Centre.





www.centurybatteries.com.au








Dependable Back-Up & Primary Power

Century PS Batteries are a range of superior quality, high performance multi-purpose batteries designed to provide dependable primary and back-up power in domestic and commercial applications.

Manufactured to the latest international standards using some of the highest quality materials and internal components, Century PS batteries provide reliable, trouble free power in applications demanding high service life.

Century PS Batteries incorporate Absorbed Glass Mat (AGM) technology which suspends the liquid electrolyte within highly porous glass fibre mat separators. These act as a sponge like material absorbing the loose electrolyte, eliminating accidental leaks or spills. The VRLA (Valve Regulated Lead Acid) recombinant design eliminates the need for regular maintenance and enables fitment in hard to reach locations without the loss of performance, capacity,

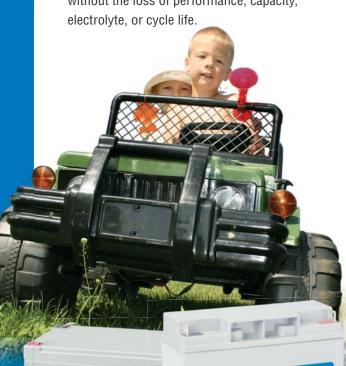



Available in 6 and 12V. Century PS Batteries incorporate a range of design and technical features to deliver good service life and reliable performance.

Superior Design & Construction.



Low internal resistance allows discharge currents up to 10 times rated capacity

✓ Easy Handling


Leak-proof construction avoids need for special handling and transportation requirements

Design Flexibility

Can be used in series and or parallel to service a range of voltage and capacity requirements

✓ Rugged Construction

High-impact resistant battery casing provides superior resistance to vibration, shock and heat

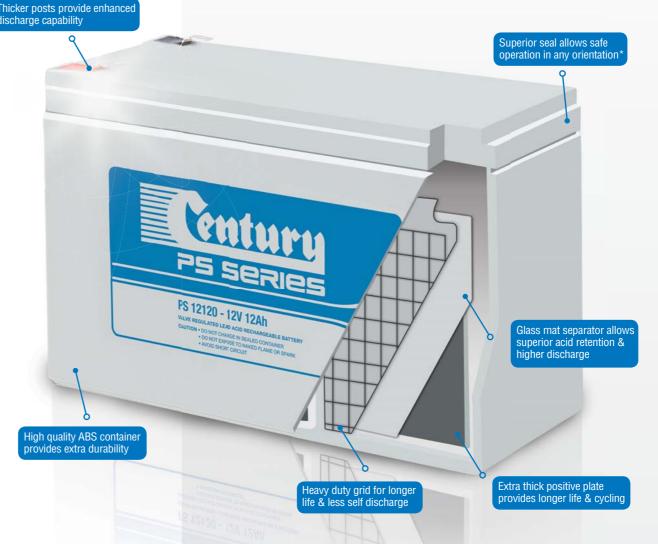

✓ Valve Regulated / Maintenance Free

> Gasses are recombined within cells, eliminating the need for topping up of electrolyte levels

✓ Longer Shelf Life

Low self discharge rates permit longer storage and shelf life

Compact

High grade materials, state of the art designs and specialist plate construction delivers high energy density and superior power to weight ratios

✓ High Charge Acceptance

Enables guicker recharge for less downtime

Primary Power Use

Century PS batteries are suitable for use in applications requiring constant power over extended periods of time. The advanced design features and specialist construction makes Century PS batteries perfect as the main power source for a range of applications including:

/ Toys

Marine equipment

Portable lighting

Power tools

- Electronic test equipment
- Television & video recorders

Alarm systems

- Vending machines
- Communications equipment
- Automated doors & security gates
- Computer servers

Back-up Power Use

Fire & security systems.

Emergency lighting systems















In back-up power applications, Century PS batteries provide dependable reserve power

to operate critical systems in the event of mains power failure. In such situations these

specialist batteries remain on charge until a mains power outage, where they engage

providing power to critical systems. These typical back-up power applications include:







